



# HE-006-FC

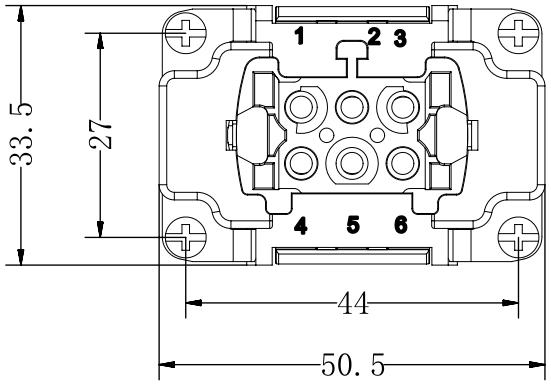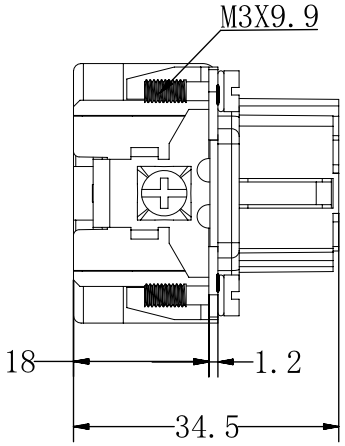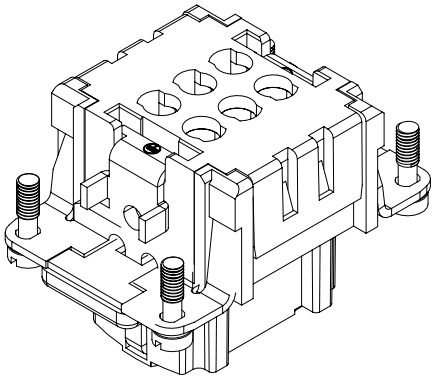

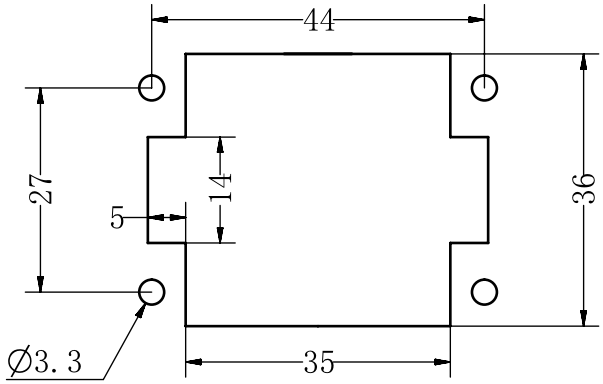


面板安装开孔图

Technical Parameters:

| Inserts: | Contacts: |
|---|---|
| - No. of contact: 6+PE | - Terminal: crimp terminal |
| - Rated current: 16A | - Material: copper alloy |
| - Rated voltage: 500V | - Surface: hard silver-plated hard gold-plated |
| - Rated impulse voltage: 6KV | - Contact resistance: ≤1mΩ |
| - Pollution degree: 3 | - Wire gauge:0.14-4.0mm²(26-12 AWG) |
| - Rated voltage acc.to UL/CSA: 600V | - Stripping length:7.5mm |
| - Material: polycarbonate | |
| - Temperature range: -40℃- +125℃ | |
| - Flammability acc.to UL 94: V0 | |
| - Mating cycles: ≥500 | |

技术参数:

插芯:
- 插针数: 6+PE
- 额定电流: 16A
- 额定电压: 500V
- 额定脉冲电压: 6KV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 材料: 聚碳酸酯
- 温度范围: -40℃- +125℃
- 依据UL 94的阻燃等级: V0
- 可拔插次数: ≥500

插针:
- 连接方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银 镀金
- 接触电阻: ≤1mΩ
- 线径范围: 0.14-4.0mm²(26-12 AWG)
- 剥线长度: 7.5mm

| 未注公差所依标准/Standard of tolerance | | | | | |
|---|---|---|---|---|---|
| 公差等级 Tolerance lever | 基本线性尺寸分段/Basic linear size segmentation | | | | |
| | 0.5~3 | >3~6 | >6~30 | >30~120 | >120~400 |
| 中等m | ±0.1 | ±0.1 | ±0.2 | ±0.3 | ±0.5 |
| 公差等级 Tolerance lever | 基本倒角尺寸分段/Basic chamfer size segmentation | | | | |
| | 0.5~3 | >3~6 | >6~30 | >30 | |
| 中等m | ±0.2 | ±0.5 | ±1 | ±2 | |
| 公差等级 Tolerance lever | 基本角度尺寸分段/Basic angular dimension segmentation | | | | |
| | ~10 | >10~50 | >50~120 | >120~400 | |
| 中等m | ±1° | ±30′ | ±20′ | ±10′ | |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | 表面处理 Finish | | – | | 图号 Drawing NO. | WF-ED-HC-173 |
| | | | | 材料 material | | – | | 产品型号 Part Trpe | HE-006-FC |
| 标记 Mark | 变更描述/Description | 签名 Signature | 日期 Date | 比例 Scale | 版本 REV | 重量 Weight | 数量 Qty. | 产品料号 Part NO. | 300602020102 |
| | 姓名/Name | 日期/Data | | 1:1 | B0 | | | 产品名称 Part Name | HE-006-FC |
| 绘图 Drawn | Zhoukaiqi | 26/06/12 | | | | | | | |
| 审核 Checked | Luping | 26/06/12 | | | | All Dimensions in mm Original Size DIN A4 | | WEVEL 苏州威弗电气 SUZHOU WEVEL ELECTRICAL CO.,LTD | |
| 批准 Approved | Hongshuhao | 26/06/12 | | | | | | | |

档案员

日期