

HK-004-2-M

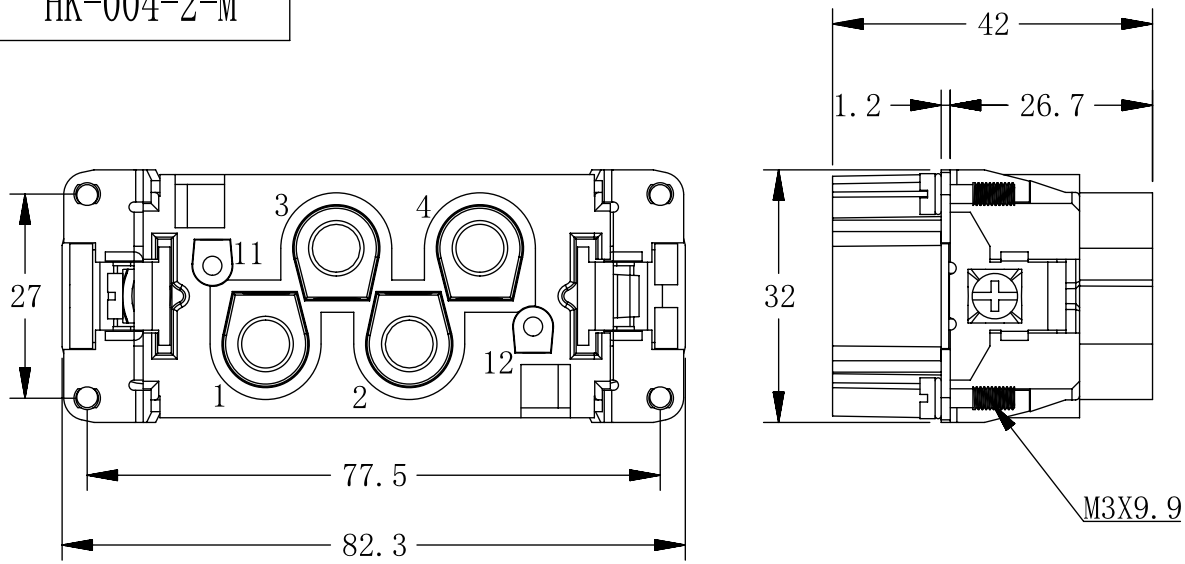

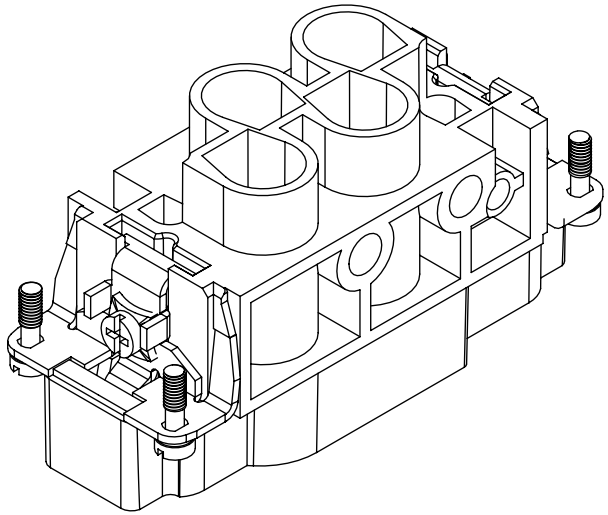

Technical Parameters:

Insters:
- No. of contact: 4/2
- power area:80A signal area:16A
- Rated voltage: power area:830V signal area: 400V
- Rated impulse voltage: power area:8KV signal area: 6KV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600/400V
- Temperature range: -40℃- +125℃
- Flammability acc.to UL 94: V0
- Mating cycles: ≥500

Contacts:
- Terminal: screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance:power area ≤0.3mΩ signal area: ≤1mΩ
- Wire gauge power area:1.5-16mm²(16-6 AWG) signal area1.0-2.5 mm²(18-14 AWG

技术参数:

插芯:
- 插针数: 4/2
- 额定电流: 电力区: 80A 信号区: 16A
- 额定电压: 电力区: 830V 信号区: 400V
- 额定脉冲电压: 电力区: 8KV 信号区: 6KV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600/300V
- 材料: 聚碳酸酯
- 温度范围: -40℃- +125℃
- 依据UL 94的阻燃等级: V0
- 可拔插次数: ≥500

插针:
- 连接方式: 螺钉连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: 电力区: ≤0.3mΩ 信号区: ≤1mΩ
- 线径范围: 电力区: 1.5-16mm²(16-6 AWG) 信号区: 1.0-2.5mm²(18-14AWG)

未注公差所依标准/Standard of tolerance					
公差等级 Tolerance lever	基本线性尺寸分段/Basic linear size segmentation				
中等m	0.5~3	>3~6	>6~30	>30~120	>120~400
	±0.1	±0.1	±0.2	±0.3	±0.5
公差等级 Tolerance lever	基本倒角尺寸分段/Basic chamfer size segmentation				
中等m	0.5~3	>3~6	>6~30	>30	
	±0.2	±0.5	±1	±2	
公差等级 Tolerance lever	基本角度尺寸分段/Basic angular dimension segmentation				
中等m	~10	>10~50	>50~120	>120~400	
	±1°	±30′	±20′	±10′	

				表面处理 Finish		–		图号 Drawing NO.	–
				材料 material		–		产品型号 Part Trpe	HK-004-2-M
标记 Mark	变更描述/Description	签名 Signature	日期 Date	比例 Scale	版本 REV	重量 Weight	数量 Qty.	产品料号 Part NO.	300608410101
	姓名/Name	日期/Data		1:1	A0			产品名称 Part Name	–
绘图 Drawn	Yangzhen	25/04/10							
审核 Checked	Sunmengqing	25/04/10				All Dimensions in mm Original Size DIN A4		WEVEL 苏州威弗电气 SUZHOU WEVEL ELECTRICAL CO.,LTD	
批准 Approved									

档案员

日期