HMDS-009-FJ

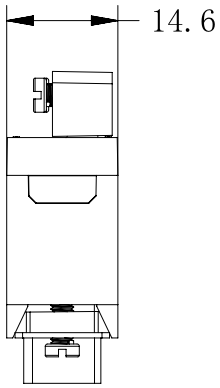

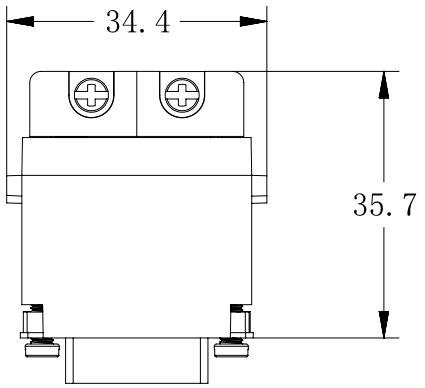

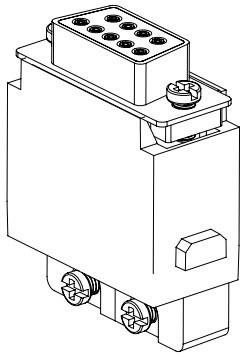



Technical Parameters:

Insters:	Contacts:
- No. of contact: 9	- Terminal: crimp terminal
- Rated current: 5A	- Material: copper alloy
- Rated voltage: 50V	- Surface: hard-silver plated
- Rated impulse voltage: 0.8KV	- Contact resistance: ≤3mΩ
- Pollution degree: 3	- Wire gauge:0.09-0.82mm²(28-18 AWG)
- Rated voltage acc.to UL/CSA: 600V	
- Material: polycarbonate	
- Temperature range: -40℃- +125℃	
- Flammability acc.to UL 94: V0	
- Mating cycles: ≥500	

技术参数:

插芯:
- 插针数: 9
- 额定电流: 5A
- 额定电压: 50V
- 额定脉冲电压: 0.8KV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 材料: 聚碳酸酯
- 温度范围: -40℃- +125℃
- 依据UL 94的阻燃等级: V0
- 可拔插次数: ≥500

插针:
- 连接方式: 冷压连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: ≤5mΩ
- 线径范围: 0.09-0.82mm²(28-18AWG)

未注公差所依标准/Standard of tolerance					
公差等级 Tolerance lever	基本线性尺寸分段/Basic linear size segmentation				
	0.5~3	>3~6	>6~30	>30~120	>120~400
中等m	±0.1	±0.1	±0.2	±0.3	±0.5
公差等级 Tolerance lever	基本倒角尺寸分段/Basic chamfer size segmentation				
	0.5~3	>3~6	>6~30	>30	
中等m	±0.2	±0.5	±1	±2	
公差等级 Tolerance lever	基本角度尺寸分段/Basic angular dimension segmentation				
	~10	>10~50	>50~120	>120~400	
中等m	±1°	±30′	±20′	±10′	

				表面处理 Finish		—		图号 Drawing NO.	-
				材料 material		—		产品型号 Part Trpe	HMDS-009-FJ
标记 Mark	变更描述/Description	签名 Signature	日期 Date	比例 Scale	版本 REV	重量 Weight	数量 Qty.	产品料号 Part NO.	300907020102
	姓名/Name	日期/Data		1:1	A1			产品名称 Part Name	-
绘图 Drawn	Yangzhen	25/04/10							
审核 Checked	Sunmengqing	25/04/10				All Dimensions in mm Original Size DIN A4		WEVEL 苏州威弗电气 SUZHOU WEVEL ELECTRICAL CO.,LTD	
批准 Approved									

档案员

日期