HMK70-002.1-F

Technical Parameters:

Insters:
- No. of contact: 2
- Rated current: 70A
- Rated voltage: 1000V
- Rated impulse voltage: 8KV
- Pollution degree: 3
- Rated voltage acc.to UL/CSA: 600V
- Material: polycarbonate
- Temperature range: -40℃- +125℃
- Flammability acc.to UL 94: V0
- Mating cycles: ≥500

Contacts:
- Terminal: axial screw terminal
- Material: copper alloy
- Surface: hard-silver plated
- Contact resistance: ≤0.5mΩ
- Wire gauge:6-16mm²
- Hexagonal driver: SW-2.5*150
- Stripping length:

mm²	6	10	16	22
mm	11	11	11	12.5

- Tightening tourque:

mm²	6	10	16	22
N.m	2	3	4	5

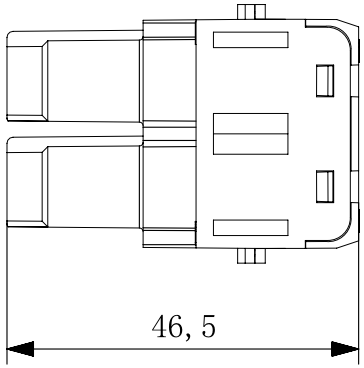

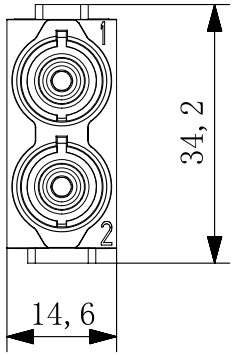

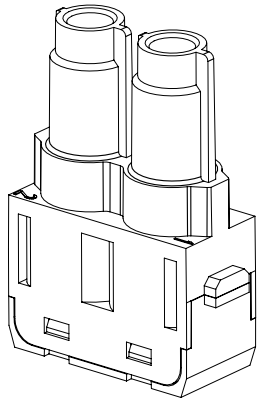

技术参数:

插芯:
- 插针数: 2
- 额定电流: 70A
- 额定电压: 1000V
- 额定脉冲电压: 8KV
- 污染等级: 3
- 依据UL/CSA的额定电压: 600V
- 材料: 聚碳酸酯
- 色号: RAL7038(浅灰色)
- 温度范围: -40℃- +125℃
- 依据UL 94的阻燃等级: V0
- 可拔插次数: ≥500

插针:
- 连接方式: 轴向螺栓连接
- 材料: 铜合金
- 表面处理: 镀银
- 接触电阻: ≤0.5mΩ
- 线径范围: 6-16mm²
- 内六角扳手: SW-2.5*150
- 剥线长度:

mm²	6	10	16	22
mm	11	11	11	12.5

- 拧紧力矩:

mm²	6	10	16	22
N.m	2	3	4	5

未注公差所依标准/Standard of tolerance					
公差等级 Tolerance lever	基本线性尺寸分段/Basic linear size segmentation				
中等m	0.5~3	>3~6	>6~30	>30~120	>120~400
	±0.1	±0.1	±0.2	±0.3	±0.5
公差等级 Tolerance lever	基本倒角尺寸分段/Basic chamfer size segmentation				
中等m	0.5~3	>3~6	>6~30	>30	
	±0.2	±0.5	±1	±2	
公差等级 Tolerance lever	基本角度尺寸分段/Basic angular dimension segmentation				
中等m	~10	>10~50	>50~120	>120~400	
	±1°	±30′	±20′	±10′	

档案员
日期

				表面处理 Finish		–		图号 Drawing NO.	–
				材料 material		–		产品型号 Part Trpe	HMK70-002.1-F
标记 Mark	变更描述/Description	签名 Signature	日期 Date	比例 Scale	版本 REV	重量 Weight	数量 Qty.	产品料号 Part NO.	300207010102
	姓名/Name	日期/Data		1:1	A0			产品名称 Part Name	–
绘图 Drawn	Yangzhen	25/04/09							
审核 Checked	Sunmengqing	25/04/09				All Dimensions in mm Original Size DIN A4		WEVEL 苏州威弗电气 SUZHOU WEVEL ELECTRICAL CO.,LTD	
批准 Approved									